

_											
	Post Size		PILE FOUNDATION				SPREAD FOOTING				
			Pedestal	Dia. Depth	Reinf.	Pedestal	Footing	Reinf.			
			1					,	Тор		JBar
- 6	0	18.97		24"	8'	#5	1'-10''x 1'-10''	4'x 6'	#4	#4	#5
6	0	28.57		24"	9'	#5	1'-10"x 1'-10"	4'x 7'	#4	#4	#5
8	8 @	28.55		30"	9'	#6	2'-2"x 2'-2"	5'x 8'	#4	#4	#5
8	0	43.39		30"	11'	#7	2'-2"x 2'-2"	6'x 9'	#4	#5	#5
10	Q	54.74	2'-10"x 2'-10"	30"	13'	#8	2'-4"x 2'-4"	7'x 10'	#5	#7	#7
12	@	65.42	2'-10"x 2'-10"	30"	15'	#10	2'-4"x 2'-4"	7'x 12'	#6	#8	#8
14	0	72.09	3'-4"x 3'-4"	36"	15'	#10	2'-11"x 2'-11"	7'x 13'	#7	#9	#8
14	@	106.13	3'-4"x 3'-4"	36"	16'	#10	2'-11"x 2'-11"	8'x 14'	#7	#9	#8


NOTES:

- 1. BACKFILL SHALL BE IN PLACE PRIOR TO ERECTION OF POST.
- 2. SLOPE PROTECTION REQUIRED WHEN INDICATED ON THE PLANS.
- 3. PILE PEDESTAL SHALL BE FORMED 6" MINIMUM BELOW GROUND SURFACE, REMAINDER SHALL BE PLACED AGAINST UNDISTURBED MATERIAL.

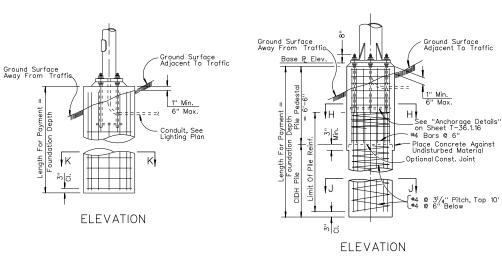


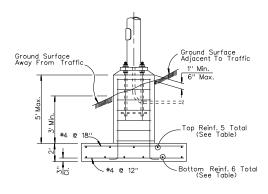

ELEVATION

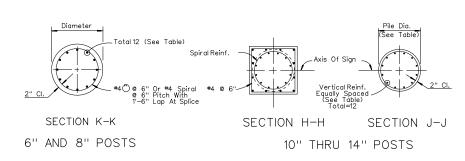

PILE FOUNDATION

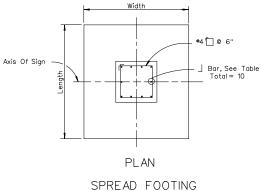

NEVADA DEPARTMENT OF TRANSPORTATION OVERHEAD SIGNS

LIGHTWEIGHT FOUNDATION

Signed Original On File T-36.1.17 CHIEF SAFETY/TRAFFIC ENGR. ADOPTED 11/95 REVISION 9/97